



Céliane™ Franco-Belgian standard socket outlets


Cat. No(s): 0 671 10/11/13/14



0 671 10



0 671 11



0 671 14

1. USE

16 A - 250 V~ socket outlets.
 With protection eclips.


2. RANGE

Description	References
2 P socket (should only be used in the event of renovation)	0 671 10*
2 P+E socket	0 671 11*
2 P+E socket special renovation Compatible with 30 mm depth boxes	0 671 13*
2 P+E temperproof socket Supplied with red cover	0 671 14


*Can be located by LED. Apply specific cover plate.

3. PRODUCT WITH BULB

■ Cat Nos 0 671 10/11

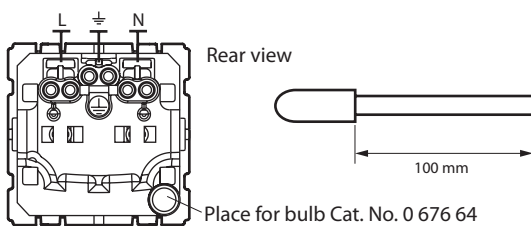

3. OVERALL DIMENSIONS(mm)

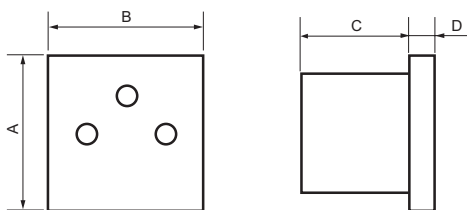


References	A	B	C	D
0 671 10/11	45	45	30	5.5
0 671 14 (without cover plate)	45	45	28.5	2.5
0 671 13	45	45	28	5.5


4. CONNECTION

■ Cat. Nos. 0 671 10/11

Terminal type: automatic
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 12 mm




Rear view Cat. No. 0 671 10




Rear view Cat. No. 0 671 11
 Color terminals: red, green, blue

■ Cat. Nos. 0 671 13/14

Terminal type: with screws
 Terminal capacity: 2 x 4 mm²
 Tightening torque: 0.8 Nm
 Stripping length: 12 mm
 Screwdriver: Posidrive No 1, Philips No1, flat 4 mm



Rear view Cat. No. 0 671 14



Rear view Cat. No. 0 671 13

5. TECHNICAL DATA

■ 5.1 Mechanical characteristics

- Impact test: IK 04
- Protection against solid and liquids bodies: IP 20
IP 41 for Cat. No. 0 671 11

■ 5.2 Material characteristics

- Mechanism: Polycarbonate
- Cover: Polycarbonate
- Halogen free
- Self-extinguishing
- + 850°C / 30 s for insulating components holding in place live parts.
- + 650°C / 30 s for the other insulating components.

■ 5.3 Electrical characteristics

Voltage: 250 V~
Current: 16 A

■ 5.4 Caractéristiques climatiques

Use temperature: - 10° C to + 70° C
Storage temperature: - 5° C to + 50° C

6. MAINTENANCE

■ Cover Cat. No. 0 671 14

Caution: An initial test is required for the use of special maintenance products.

7. ACCESSORIES

Tamperproof for plug Cat. No. 0 502 99
Bulb Cat. No 0 676 64 (230 Vac - 2.4 mA) for plug Cat. No. 0 671 11

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e-catalogue.